

INCANDESCENT



Floodlight Series *Lifetime Guarantee Against Rust and Corrosion. 150 Watts Maximum*

Designed specifically to withstand the corrosive atmosphere of coastal areas, these directional floodlights can weather the most severe environments. **Rustproof.** These versatile luminaires are constructed of virtually unbreakable, nonconductive **polycarbonate** and provided with stainless steel hardware. Perfectly suited for landscape, flood, and spot lighting. Surface Mount Wiring Box accessory eliminates the need for a recessed junction box in wall and ceiling installations.

Specifications

Socket Housing/ Cover: Injection molded of UV-stabilized **polycarbonate**. Lampholders on Model 201 rotate independently. Threaded pivot of Model 150 is 1/2" NPT.

Socket: High-temperature phenolic with medium base nickel-plated copper screw shell. Rated 250V, 660W, with wire leads insulated to 105°C.

Gasket: Silicone rubber washer (1/8" thick) is permanently secured within lampholder to seal socket and wireway from moisture with insertion of lamp. Fiber washers provide watertight seal between pivot joints.

Hardware: Stainless steel phillips truss head screw and wing nut allow angular adjustment to all lampholders. Crossbar and stainless steel mounting screw included with Models 101 and 201. 1/2" NPT nylon locknut included with Model 150.

Lamp: Provided by others. Uses brass-skirted Par 38 lamp. 150 watts maximum. Recommended lamp: 90 watt Halogen 130 volt for greater efficiency and longer lamp life.

Hood (optional): One piece, injection molded UV-stabilized **polycarbonate**. Snap-fit mounting requires no tools or hardware. Helps with light control. Adds an aesthetic value to any application. (Recommended for Lamp-up applications.)


Surface Mount Wiring Box (optional): For Models 101 and 201 only. One piece injection molded of UV-stabilized **polycarbonate**. Measures 3/8" deep. Includes 1/8" thick closed-cell neoprene rubber gasket to seal against moisture and contaminants. Easily attaches with screws or nails.

Power Cord: Six-foot SJT 18-gauge two-conductor rated 105°C. (Model 101-S) (For Model 101-S only) (Model 101-S Not UL Listed.)


UL Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94-5V.


Luminaire Type _____
 Catalog Number _____
 Job Name _____
 Approval _____

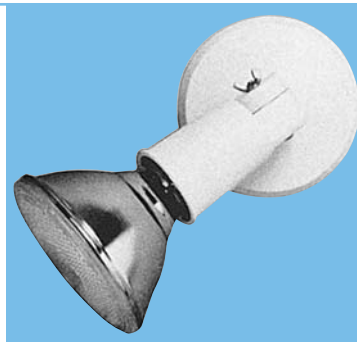


101-W Shown in White



150-W Shown in White

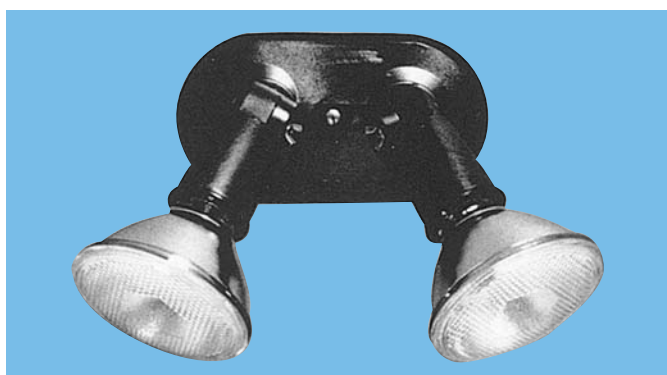

201-BK Shown in Black

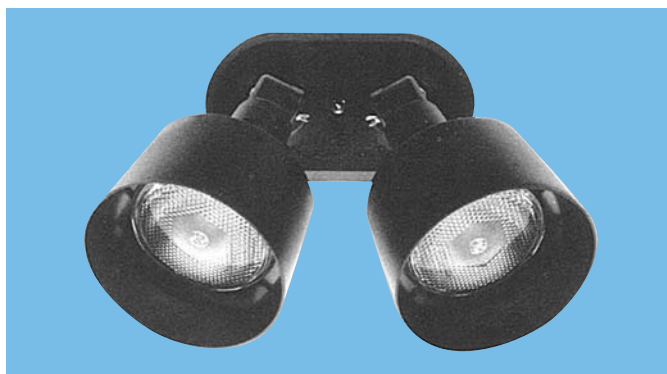

201-BK with Two 400-BK Hoods (Black)



1BW Surface Mount Wiring Box (White)



2BW Surface Mount Wiring Box (White)

WF Harris Lighting

Innovative Lighting Designs Since 1970

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

INCANDESCENT

Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Color	Options	Accessories (Order separately)
Model	Color	Option	
101	Single Floodlight	BK-Black	HOOD (Model 201 Requires Two)
101-S	Stake Floodlight	W- White	400BK-Black
150	Threaded Floodlight	BZ-Bronze	400W-White
201	Double Floodlight		400BZ-Bronze
		PC-Photo Control (Model 201 Only)	SURFACE MOUNT WIRING BOX FOR MODEL 101
		WH-Weep Holes for Up-Aimed Fixtures	1BK-Black
			1BW-White
			1BZ-Bronze
			SURFACE MOUNT WIRING BOX FOR MODEL 201
			2BK-Black
			2BW-White
			2BZ-Bronze



**Model 201 Shown
With Photo Control**




**Model 101 Shown With
Surface Mount Wiring Box**




**Model 201 Shown With
Surface Mount Wiring Box**


Dimensions




Model 101

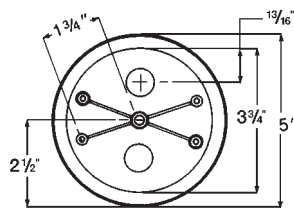

Surface Mount Wiring Box For Model 101

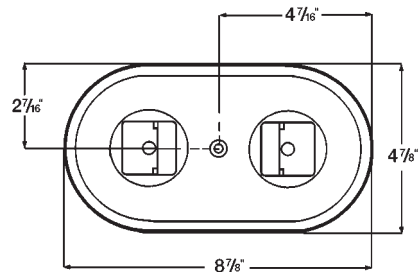

Model 201

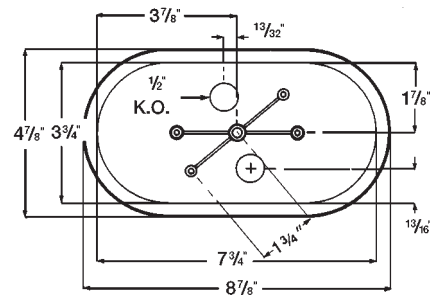

Surface Mount Wiring Box For Model 201

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

HOUSING/HOOD CARRY A LIFETIME GUARANTEE.

MADE IN USA

WF Harris Lighting

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

(704) 283-7477 • (704) 283-6880(FAX) • (800) 842-9345(TOLL FREE)

www.wfharris.com • e-mail: info@wfharris.com

Printed in USA

Form 1535

09/07