

FLUORESCENT

80-WP PLT Series
8⁷/₈" Square

Rustproof Vandal-Resistant Wall Luminaire
42 Watts Maximum - Electronic
Lamp and Ballast System



The lens, lamp orientation, and internal reflector in this wall-pack luminaire are designed to produce optimal light directly in front of and along building walls. Engineered with materials offering the **highest resistance to rust, corrosion, and impact**. The **polycarbonate** housing is lightweight for easy installation and is totally non-conductive for safety during installation and relamping. Smooth exterior lens allows ease of cleaning, clear prismatic interior for optimal lumen output, rounded corners for increased impact strength and safety. Ideally suited as security or aesthetic lighting for the interior/exterior walls of commercial and industrial buildings, schools, hospitals, public housing, and government installations. **The PLT lamp is four pin and 0°F (-18°C) minimum starting temperature.**



Specifications

Lens: One piece, prismatic, injection molded of UV-stabilized **polycarbonate**. Average thickness is 1/8". Smooth exterior surface for ease of cleaning, rounded corners for increased impact strength and safety. Masked in bronze or white, high-temperature, weather-resistant polyurethane paint.

Base Plate: **Rustproof** .063" 5052 H-32 tempered marine-grade aluminum.

Housing: (optional) Injection molded of UV-stabilized reinforced bronze or white **polycarbonate**. Rear knockout for supply wire. Available with up to four threaded connections and plugs suitable for 1/2" conduit (specify connection positions).

Gasket: (optional) Lens gasket and mounting gasket are closed-cell neoprene rubber. (Required for wet location.)

Socket: Four pin. 75W, 600V for GX24Q base.


Reflector: Highly reflective anodized aluminum finish.

Lamp: (optional) PLT four pin Electronic. 0°F (-18°C) starting.


Ballast: Electronic P rated, high power factor. 120V, 277V, or 347V. 0°F (-18°C) starting temperature.

Hardware: Four stainless-steel 8-32 phillips truss head screws or tamperproof screws (TORX® type) attach lens to base plate. Mounting hardware included.

Exploded View

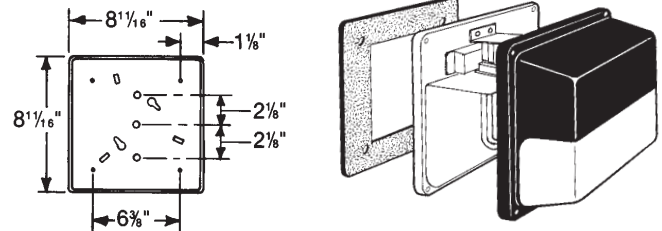

Dimensions



UL, C-UL Listed For Damp or Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type _____
 Catalog Number _____
 Job Name _____
 Approval _____

WF Harris Lighting

Innovative Lighting Solutions Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

(704) 283-7477 • (704) 283-6880 (FAX) • (800) 842-9345 (TOLL FREE)


www.wfharris.com • email: info@wfharris.com

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

FLUORESCENT


Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Housing	Watts-Lamp	Power Factor	Volts	Options	Conduit Connections
80-WP	HB -Bronze HW -White	18 PLT 26 PLT 32 PLT 42 PLT	HPF	120-277¹ 347¹	LP-LAMP PC -Photo Control (80B Required) 80H __-Housing. Please Specify Color B -Bronze W -White EM -(1 Lamp) One Lamp Operates Full Time and During Emergency EM0 -(1 Lamp) One Lamp Only Operates During Emergency TPS -Tamperproof Screws WL -Wet Location Gasket FS -Fuse and Holder W -For Wet Location Emergency (EM) Unit Only	CRS -Right Side CLS -Left Side CT -Top CB -Bottom C4 -All (Positions Based on Facing Fixture)

Accessories (Order Separately)
TPT-Tamperproof Screwdriver  ¹ Housing included

Light Distribution Patterns

Model 80-WP-1-26W PLT
Wall Mounted 8' M.H.
Test Report No. ITL47349

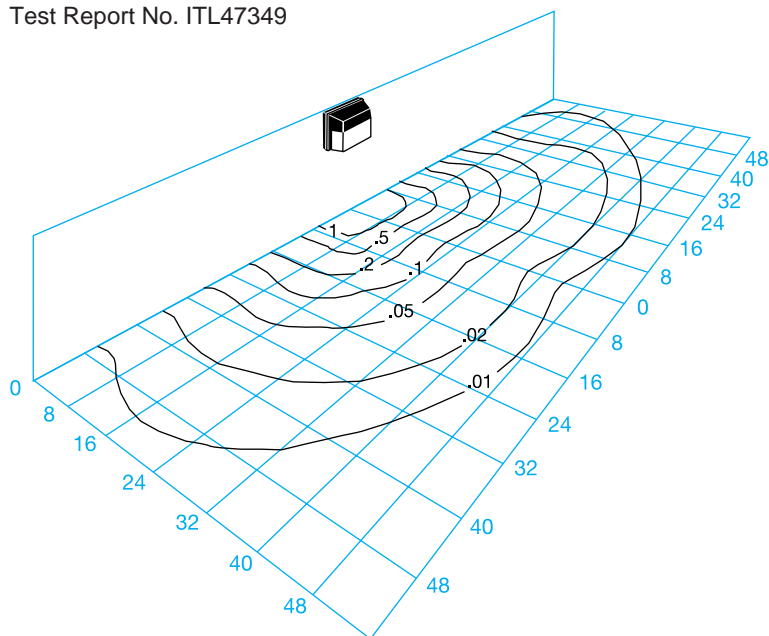

Conversion Tables

Lamp	Lamp Conversion Factor	Mounting Height	Height Conversion Factor
18 PLT	.67	8'	1.00
26 PLT	1.00	10'	.64
32 PLT	1.33	12'	.44
42 PLT	1.76		

Using Conversion Table

TO ADJUST FOOTCANDLES (FC) SHOWN IN DIAGRAM AT LEFT, USE FOLLOWING FORMULA WITH LAMP CONVERSION FACTOR (LCF) AND HEIGHT CONVERSION FACTOR (HCF):

$$\begin{aligned} \text{FC} \times \text{LCF} &= \text{FC with alternate lamp} \\ \text{FC} \times \text{HCF} &= \text{FC at alternate height} \\ \text{FC} \times \text{LCF} \times \text{HCF} &= \text{FC with alternate lamp} \\ &\quad \text{at alternate height} \end{aligned}$$

Fluorescent Lamp Performance

	Input Watts	Lumen Output	Lamp Life (Hours)	Min. Starting Temperature
18 PLT	20W	1,200	10,000	0°F (-18°C)
26 PLT	29W	1,800	10,000	0°F (-18°C)
32 PLT	36W	2,400	10,000	0°F (-18°C)
42 PLT	46W	3,200	10,000	0°F (-18°C)

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

**LENS, HOUSING, AND ALUMINUM BASE
PLATE CARRY A LIFETIME GUARANTEE.**

MADE IN  USA

WF Harris Lighting

Innovative Lighting Solutions Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA
(704) 283-7477 • (704) 283-6880 (FAX) • (800) 842-9345 (TOLL FREE)
www.wfharris.com • email: info@wfharris.com

Printed in USA
Form 1556 04/05