

# PORTABLE AREA WORKLIGHT INCANDESCENT



**300-WL-INC** *Rustproof Vandal-Resistant Luminaire  
75 Watts Maximum*

Specifically designed to provide illumination in on-site production areas where endurance to environmental elements are as important as dependable, reliable service. Engineered with materials offering high resistance to rust, corrosion, and impact. **Polycarbonate** Safety Yellow Housing is nonconductive, insuring more safety to the end user. Two maximum-secure magnets (pull strength rated 90 lbs each) and one eye bolt, both integral to the Worklight, allow convenient mounting either to a steel structure or overhead by a safety chain (not included). **Polycarbonate** lens with smooth exterior allows ease of cleaning and clear prismatic interior assures optimal lumen output. Ideally suited in the construction and assembly work in commercial, industrial, and government manufacturing operations.



## Specifications

<b>Lens:</b>	Injection molded of UV-stabilized polycarbonate for lens impact strength and user safety. Average thickness is $\frac{1}{8}$ ". Clear prismatic interior for optimal lumen output, smooth exterior surface for ease of cleaning.
<b>Base Plate:</b>	Rustproof .080" 5052 H-32 tempered marine-grade aluminum.
<b>Gasket:</b>	Lens gasket is closed-cell neoprene rubber for maximum dirt, dust and moisture barrier.
<b>Housing:</b>	Injection molded of UV-stabilized reinforced Safety Yellow polycarbonate for impact strength.
<b>Cord, Plug, and Fittings:</b>	Six-foot black 18 AWG SJTOW cord, with 3-prong NEMA 5-15 plug. Liquid Tight Fitting exceeds NEMA 6 specifications
<b>Socket:</b>	Medium-base ceramic with nickel-plated copper screw shell, rated 250 V, 660W, with leads insulated for 105°C.
<b>Lamp</b>	Uses Type A-19 incandescent lamp. Provided by others.

**Hardware:** Four stainless-steel 8-32 phillips truss head screws attach lens to base plate. On/Off Toggle Switch is hard plastic with rubber boot. Two maximum-secure Magnets pull strength rated for holding 90 lbs each. One Eyebolt for mounting by safety chain (not included).

ETL-US Listed 153

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_

**WF Harris Lighting, Inc.**

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA

(704) 283-7477 (HEADQUARTERS) • (800) 842-9345 (TOLL FREE)

e-mail: customerservice@wfarris.com

www.wfharrislighting.com

Printed in USA

Form 1502

3/18

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*


# PORTABLE AREA WORKLIGHT INCANDESCENT

Ordering Information (Fill In Block For Complete Catalog Number)

Model

300-WL-INC

## Dimensions

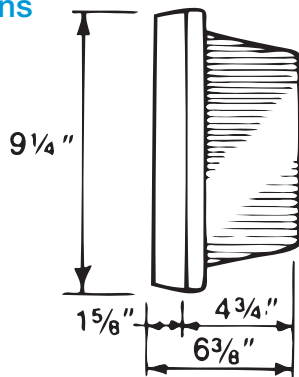

Specifications Subject to Change Without Notice

LENS, HOUSING, AND ALUMINUM BASE  
PLATE CARRY A LIFETIME GUARANTEE.



**WF Harris Lighting, Inc.**

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA  
(704) 283-7477 (HEADQUARTERS) • (800) 842-9345 (TOLL FREE)

e-mail: [customerservice@wfharris.com](mailto:customerservice@wfharris.com)

[www.wfharrislighting.com](http://www.wfharrislighting.com)